






LIGHT Series



Application :
Thin Client, Network device, Set-Top Box, VPN, VOIP and POS system

Technical Data :

· Dimension	48.5 H x 234 W x 175 D mm
· Material	Aluminum + Plastic (Silver Cover)
· Color	Blue / Silver
· Weight	1 Kgs (Incl. M/B)
· Storage Space	1 x 2.5" HDD
· LED Light	Power / Network / HDD
· Front Connector	1 x USB, Mic-in, Lin-out

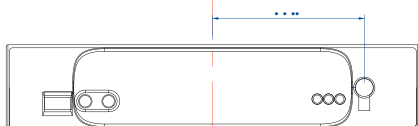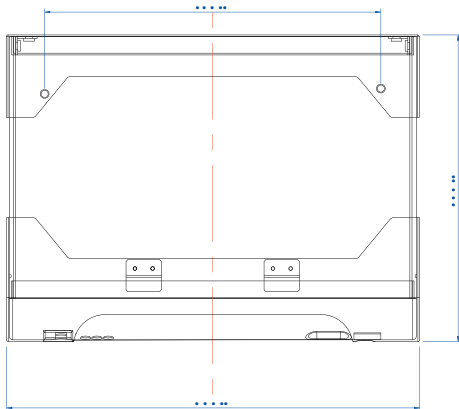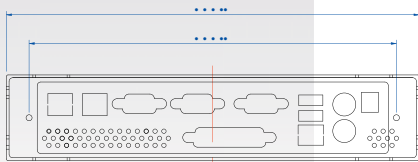

LIGHT Chassis without top-cover



M/B information: (Please refer to M/B specification)

M/B Model	Description
CV860A	1~3 LAN
CV862A	Pin Head connector
CV860C	4 COM Ports
CV863A	2 PCMCIA Slot / 4 LAN
CV866C	4 COM Ports, LVDS
SV823A	4~16 Video in
MV823A	2 IEEE1394 / Video in & TV-out
MV823S	1 LAN, TV-out
CV700A	1~3 LAN
CV700C	6 COM Ports
CV763A	2 PCMCIA Slot / 4 LAN
MV700A	Twin-view / Video-in, LVDS(option)
CI852A	4 LAN
CI852C	4 COM ports
SI852A	4~16 Video-in

Option (Function inside the case)

Wireless Lan	Chip: ATMEL , USB Interface , 802.11g Standard , Driver: Win98,ME,2K,XP,Linux, 128bit WEP Encryption Support
56K Modem(CX)	Chip: Conexant , USB Interface , Driver: Win98,ME,2K,XP,Linux
ISDN	Chip: Cologne, ISDN Standard ETSI Euro ISDN, Driver: Win98,ME,2K,XP,Linux
ADSL	Chip: Conexant , ANSI T.1413 Issue 2, ITU-T G.992(G.dmt) and G.992.2(G.lite) Annex A,B. Driver: Win98,ME,2K,XP,Linux

